


**COMBINATION ROLLERS
BW 100 AC-5, BW 120 AC-5**


PERFORMANCE DATA

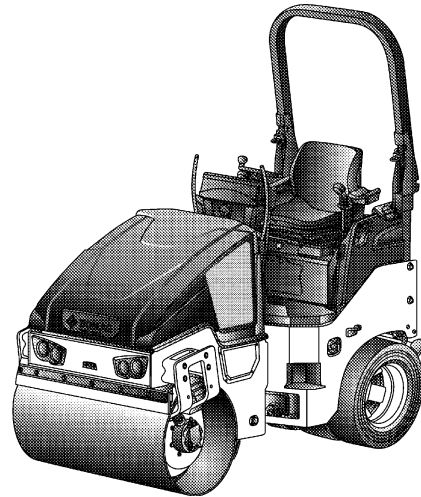

Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	2-4 cm	6-8 cm	10-14 cm
BW 100 AC-5	15-35	35-50	45-90
BW 120 AC-5	20-40	40-60	55-105

Technical Data

Shipping dimensions in m3	without ROPS	with ROPS
BW 100 AC-5	4,902	6,962
BW 120 AC-5	5,816	8,261

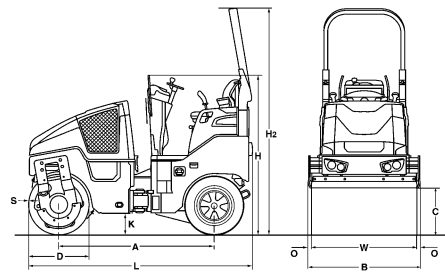

Standard Equipment

- Four smooth rear rubber wheels
- Pressure sprinkler system with interval switch
- Suspended operator's platform
- 2 scrapers per drum, spring loaded and tiltable
- Multi function travel lever
- Multi-function display incl. operating hour meter
- Water level
- electronic fuel gauge
- Emergency STOP
- Intelligent Vibration Control (IVC)
- Integrated stowage compartment
- Adjustable operator's seat
- Lashing eyes, galvanized
- Back-up alarm
- Single point lifting device
- V-belt protection
- Vandalism protection
- Lockable engine hood made of composite material
- Working lights front and rear
- 12V socket
- Seat contact switch
- Plastic water tank

Optional Equipment

- * Foldable ROPS incl. seat belt
- Edge cutter
- Sliding seat incl. double travel lever
- Battery disconnect switch
- Indicator and hazard lights
- Rotary beacon
- Optional lighting on ROPS
- Sun roof, rigid
- Sun roof, foldable with ROPS
- Weather protection for sun roof
- Special painting
- Seat heating
- Backup warning buzzer with broadband technology
- Environmentally compliant hydraulic oil
- Tool kit
- Theft protection
- BOMAG TELEMATIC
- ECONOMIZER

* Standard delivery with CE conformity (valid within European Union)

Dimensions in mm

	A	B	C	D	H	H2	K	L	O	S	W
BW 100 AC-5	1752	1072	523	700	1808	2568	254	2529	36	13	1000
BW 120 AC-5	1752	1272	523	700	1808	2568	254	2529	36	13	1200

Technical Data

Weights

	kg	BOMAG BW 100 AC-5	BOMAG BW 120 AC-5
Operating weight w. ROPS CECE	kg	2.300	2.450
Axle load, drum / wheels CECE	kg	1.150/1.150	1.200/1.250
Wheel load CECE	kg	288	313
Static linear load, front CECE	kg/cm	11,5	10,0
Grossweight	kg	2.800	2.950

Dimensions

	mm	BOMAG BW 100 AC-5	BOMAG BW 120 AC-5
Working width	mm	1.000	1.200
Track radius, inner	mm	2.550	2.450

Driving Characteristics

	km/h	BOMAG BW 100 AC-5	BOMAG BW 120 AC-5
Speed	km/h	0- 10,0	0- 10,0
Working speed with vibration	km/h	0- 10,0	0- 10,0
Max. gradeability without/with vibr.	%	40/30	40/30

Drive

		BOMAG BW 100 AC-5	BOMAG BW 120 AC-5
Engine manufacturer		Kubota	Kubota
Type		D 1703	D 1703
Emission stage		3a /4i	3a /4i
Cooling		water	water
Number of cylinders		3	3
Performance ISO 14396	kW	24,3	24,3
Performance SAE J 1995	hp	32,6	32,6
Speed	min-1	2.600	2.600
Speed adjustment 1	min-1	2.500	2.500
Speed adjustment 2	min-1	2.600	2.600
Electric equipment	V	12	12
Driven drum		standard	standard
Driven wheels		4	4

Drums and Tyres

		BOMAG BW 100 AC-5	BOMAG BW 120 AC-5
Tyre size		205/60-15	9.5/65-15

Brakes

		BOMAG BW 100 AC-5	BOMAG BW 120 AC-5
Service brake		hydrost.	hydrost.
Parking brake		hydromec.	hydromec.

Steering

		BOMAG BW 100 AC-5	BOMAG BW 120 AC-5
Steering system		oscil.artic.	oscil.artic.
Steering method		hydrost.	hydrost.
Steering / oscillating angle +/-	grad	32/10	32/10
Crab walk		0- 50	0- 50

Exciter system

		BOMAG BW 100 AC-5	BOMAG BW 120 AC-5
Vibrating drum		front	front
Drive system		hydrost.	hydrost.
Frequency	Hz	63/67	63/67
Amplitude	mm	0,49/0,49	0,51/0,51
Centrifugal force	kN	30/34	36/41

Sprinkler System

		BOMAG BW 100 AC-5	BOMAG BW 120 AC-5
Type of sprinkling		pressure	pressure

Capacities

	l	BOMAG BW 100 AC-5	BOMAG BW 120 AC-5
Fuel	l	35,0	35,0
Water	l	160,0	160,0
Emulsion	l	45,0	45,0

Technical modifications reserved. Machines may be shown with options.

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

