




TECHNICAL DATA

COMBINATION ROLLERS

BW 151 AC-5, BW 161 AC - 5



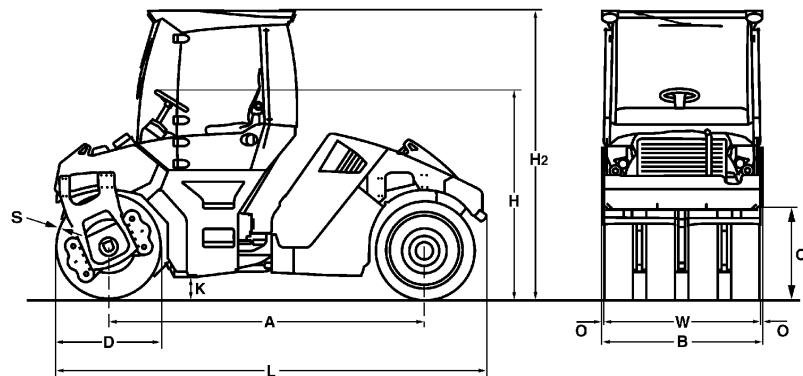

Dimensions in in

	A	B	C	D	H	H2	K	L	O	S	W
BW 151 AC-5	129.9	72.6	28.7	43.3	88.2	118.1	9.8	173.2	3.2	0.6	66.1
BW 161 AC - 5	142.5	72.2	26.4	48.0	91.1	120.1	9.8	190.6	3.1	0.7	66.1

Shipping dimensions in cub.yd

BW 151 AC-5
BW 161 AC - 5

without ROPS

23.767
26.903

with ROPS

31.824
35.467

Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	0.8-1.6 in	2.4-3.1 in	3.9-5.5 in
BW 151 AC-5	40-80	100-180	140-200
BW 161 AC - 5	40-80	100-180	140-200

Technical Data		BOMAG BW 151 AC-5	BOMAG BW 161 AC - 5
Weights			
Operating weight CECE w. ROPS-cabin	lb	16,535	21,385
Static linear load CECE	lb/in	130.0	170.0
Axle load, drum CECE	lb	8,598	11,244
Axle load, wheels CECE	lb	7,937	10,141
Wheel load CECE	lb	1,984	2,535
Grossweight	lb	18,739	24,692
Dimensions			
Track radius, inner	in	172.8	192.9
Length (without towing hitch)	in	173.2	190.6
Driving Characteristics			
Max. travel speed	mph	0- 7.5	0- 7.5
Max. gradeability without/with vibr.	%	40/30	35/30
Drive			
Engine manufacturer		Kubota	Kubota
Type		V3307 CR-T	V3800 CR-TI
Emission stage		3b/4	3b/4i
Cooling		water	water
Number of cylinders		4	4
Performance ISO 14396	kW	55.4	85.0
Speed	min-1	2,400	2,600
Drums and Tyres			
Drum width	in	66.1	66.1
Number of tyres		4	4
Tyre size		11.00-20 18PR	11.00-20 18PR
Brakes			
Service brake		hydrost.	hydrost.
Parking brake		multi disc	multi disc
Steering			
Steering system		oscil.artic.	oscil.artic.
Exciter system			
Autom. vibr. shut off		standard	standard
Frequency	vpm	2,700/3,300	2,400/3,300
Amplitude	in	0.027/0.011	0.034/0.017
Centrifugal force	lb	15,512/9,217	21,357/20,233
Centrifugal force	t	7.0/4.2	9.7/9.2
Capacities			
Fuel	gal	33.0	38.3
Water	gal	158.5	198.1

Technical modifications reserved. Machines may be shown with options.

Standard Equipment

- 2 amplitudes / 2 frequencies
- ECOMODE
- Autom. vibration operation
- Driver's seat, slewable (-15/+75°)
 - laterally slideable with steering wheel
- 2 travel levers with integrated switches for vibration
 - + Edge pressing roller
 - + Crab steer right/left
 - + Warning horn
- On-board computer
 - engine oil temperature
 - Speedometer
 - Fuel consumption
 - Engine temperature
- V-belt protection
- Compartments for documents and tools
- Pressure sprinkling system with 3 pumps (Water/Emulsion)
- Back-up alarm
- Battery disconnect switch
- Emergency stop button

Optional Equipment

- ROPS cabin with seat belts
 - + heating, Ventilation
 - + 4 Working head lights
- ROPS cabin with air conditioning
- Rotary beacon
- Crab-walk to both sides (6.7in)
- 2 LED-lights for cabin roof (flatbeam)
- Edge cutter
- Special painting
- Environmentally compliant hydraulic oil
- Radio/Radio preparation
- ROPS/FOPS with safety belt
- Precision spreader BS180
- Precision spreader BS180 laterally slideable
- Asphalt temperature display
- Lighting for drum edge front and rear
- Seat heating
- Frequency 4,200vpm
- Approval by the German TÜV
- Thermal aprons
- BOMAG TELEMATIC POWER
- Outside mirrors
- ECONOMIZER
- BCM-Documentation system