




XT Mobile Shear (GXT)

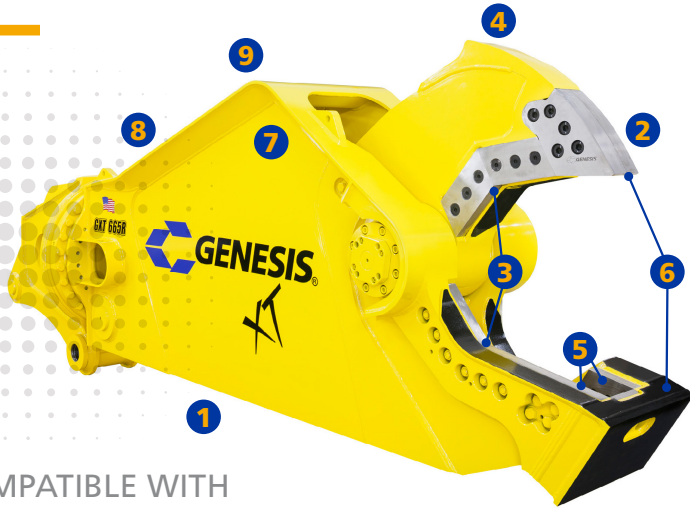

Features

1. All the power in a shorter, lighter shear with a center of gravity closer to the excavator. Most models mount on smaller size carriers for lower initial investment and hourly operating costs.
2. Bolt-on piercing tip encapsulates front of upper jaw, minimizing risk of damage while reducing welding build-up and downtime
3. Short primary cutting blades position apex closer to the rear of the jaws and draw material further into the jaws where higher force makes efficient cuts
4. Weld-on, replaceable, highly abrasion-resistant steel rhino horn protects front of upper jaw, reducing downtime and welding build-up
5. Dual guide blade length matches piercing tip length enabling blades to be shimmed independently to accommodate piercing tip wear
6. Improved jaw geometry makes it easier to pick up material and reduces wear from ground contact
7. Reverse-mounted hydraulic cylinder shortens shear length and weight while protecting rod from damage
8. Remote-mounted hydraulic speed valve improves serviceability and minimizes stress on other critical hydraulic components
9. Lower shear height improves visibility while providing superior rigidity and structural integrity

Applications

- Scrap processing
- Demolition

COMPATIBLE WITH



Model	Weight* kg (lb)	Jaw Opening mm (in)	Jaw Depth mm (in)	Reach** mm (ft in)	Min. Excavator Wt.	
					Boom Mount*** mt (lb)	Stick Mount*** mt (lb)
GXT 115****	1,406 (3,100)	406 (16)	457 (18)	1,524 (5' 0")	7 (15,000)	11 (25,000)
GXT 115R****	1,610 (3,550)	406 (16)	457 (18)	2,337 (7' 8")	8 (18,000)	14 (30,000)
GXT 225	1,905 (4,200)	457 (18)	508 (20)	1,727 (5' 8")	11 (25,000)	16 (35,000)
GXT 225R	2,223 (4,900)	457 (18)	508 (20)	2,413 (7' 11")	14 (30,000)	20 (45,000)
GXT 335	2,948 (6,500)	584 (23)	660 (26)	1,956 (6' 5")	12 (27,000)	20 (45,000)
GXT 335R	3,311 (7,300)	584 (23)	660 (26)	2,718 (8' 11")	17 (37,000)	30 (66,000)
GXT 445	4,309 (9,500)	711 (28)	711 (28)	2,184 (7' 2")	18 (40,000)	34 (75,000)
GXT 445R	4,990 (11,000)	711 (28)	711 (28)	3,073 (10' 1")	22 (48,000)	41 (90,000)
GXT 555	5,262 (11,600)	762 (30)	762 (30)	2,438 (8' 0")	23 (50,000)	41 (90,000)
GXT 555R	5,942 (13,100)	762 (30)	762 (30)	3,353 (11' 0")	25 (55,000)	50 (110,000)
GXT 665	5,987 (13,200)	813 (32)	813 (32)	2,743 (9' 0")	25 (55,000)	50 (110,000)
GXT 665R	6,668 (14,700)	813 (32)	813 (32)	3,658 (12' 0")	31 (68,000)	54 (120,000)
GXT 775	7,031 (15,500)	889 (35)	940 (37)	2,946 (9' 8")	31 (68,000)	61 (135,000)
GXT 775R	8,051 (17,750)	889 (35)	940 (37)	3,962 (13' 0")	36 (79,000)	68 (150,000)
GXT 995	8,165 (18,000)	991 (39)	1,067 (42)	3,251 (10' 8")	36 (79,000)	77 (170,000)
GXT 995R	9,072 (20,000)	991 (39)	1,067 (42)	4,318 (14' 2")	45 (100,000)	82 (180,000)
GXT 1555	10,433 (23,000)	1,118 (44)	1,168 (46)	4,089 (13' 5")	50 (110,000)	86 (190,000)
GXT 1555R	12,134 (26,750)	1,118 (44)	1,168 (46)	5,232 (17' 2")	66 (145,000)	113 (250,000)
GXT 2055	14,515 (32,000)	1,219 (48)	1,270 (50)	4,394 (14' 5")	66 (145,000)	Contact Factory
GXT 2055R	16,420 (36,200)	1,219 (48)	1,270 (50)	5,359 (17' 7")	81 (180,000)	Contact Factory
GXT 2555	22,906 (50,500)	1,372 (54)	1,422 (56)	4,699 (15' 5")	Contact Factory	Contact Factory
GXT 2555R	25,628 (56,500)	1,372 (54)	1,422 (56)	6,528 (21' 5")	Contact Factory	Contact Factor

*Weight includes mounting bracket to attach to excavator. **Distance is measured from the attachment mounting pivot (boom or stick) forward. ***2nd-member installations that are at or near minimum excavator weight and all 3rd-member installations require pre-approval from Genesis. ****The GXT 115 and GXT 115R have a single guide blade. GXT shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance. Patents: genesisattachments.com/products/patents

