




Concrete Processor (GCP)

Features

1. Power is derived from a protected large-bore cylinder, eliminating the need for an intensifier
2. One-piece bolt-on tooth bed and bottom wear pad protect parent material, are quick and easy to replace, and minimize build-up and hard-surfacing
3. Bolt-on rebar cutting blades and weld-in blade pockets are easy to replace and reduce maintenance
4. Large jaw opening readily pulverizes thick concrete
5. Heavy-duty pivot design with recessed end caps provides structural strength and long-term durability
6. Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems

Applications

- Concrete Recycling
- Demolition

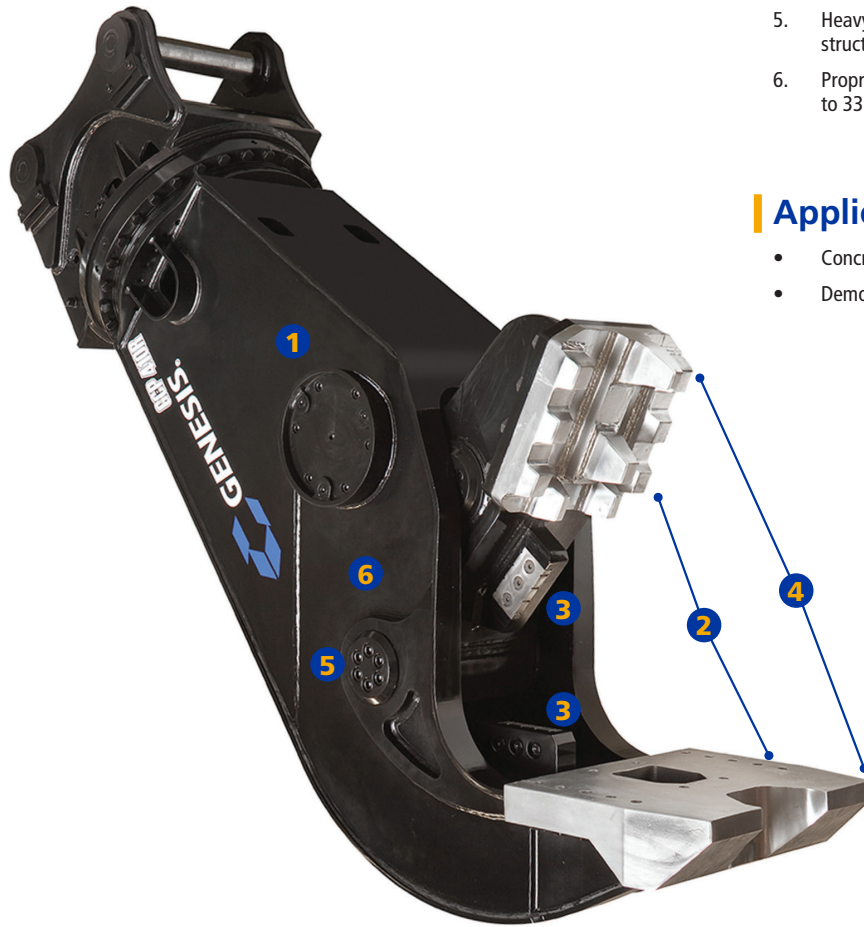

Model	Weight* kg (lb)	Jaw Opening mm (in)	Jaw Depth mm (in)	Jaw Width mm (in)	Reach** mm (ft. in)	Minimum Excavator Wt. Stick Mount mt (lb)
GCP 410	2,109 (4,650)	864 (34)	737 (29)	508 (20)	2,057 (6' 9")	20 (45,000)
GCP 410R	3,016 (6,650)	864 (34)	737 (29)	508 (20)	2,362 (7' 9")	25 (55,000)
GCP 610	4,695 (10,350)	1,245 (49)	1,016 (40)	762 (30)	2,642 (8' 8")	34 (75,000)
GCP 610R	5,239 (11,550)	1,245 (49)	1,016 (40)	762 (30)	2,946 (9' 8")	43 (95,000)

*Weight includes mounting bracket to attach to excavator. **Distance is measured from the attachment mounting pivot (boom or stick) forward. Genesis Concrete Processors are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance. Patents: genesisattachments.com/products/patents

